



Pensilina Stelo

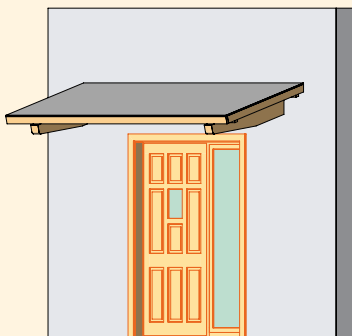

Cod. PST200 cm 130x200
Cod. PST300 cm 130x300

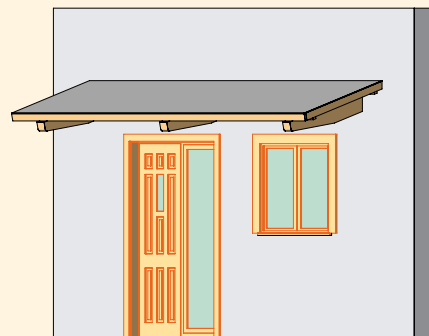

Cod. PST400 cm 130x400

Dati tecnici

- Mensola completa di staffa in acciaio sez mm 100x200.
- Arcarecci sez mm 45x90.
- Cornici sez mm 27x80.
- Legno impregnato a pressione RAL3 con preservanti senza cromo e arsenico.
- Copertura in perlinato grezzo spessore mm 19 e membrana bituminosa.

Données techniques

- Poutre à saillie complète d'étriers en acier sect. mm 100x200.
- Pannes sect. mm 45x90.
- Corniches sect. mm 27x80.
- Bois imprégné sous pression RAL3 avec des préservateurs sans du chrome et de l'arsenic.
- Couverture en lambris brut esp. mm 19 et membrane bitumineuse.


Datos técnicos

- Ménsula completa de estribo de acero secc. mm 100x200.
- Cabios secc. mm 45x90.
- Cornisas secc. mm 27x80.
- Madera impregnada a presión RAL 3 con protectores sin cromo ni arsénico.
- Recubrimiento de tablas brutas esp. mm 19 y membrana bituminosa.


Technical data

- Cantilever with steel brackets sect. mm 100x200.
- Purlins sect. mm 45x90.
- Frames sect. mm 27x80.
- RAL 3 Pressure impregnated wood with chromium and arsenic-free preservatives.
- Cover in rough matchboarding thick. mm 19 and bituminous membrane.

Je Pensiline

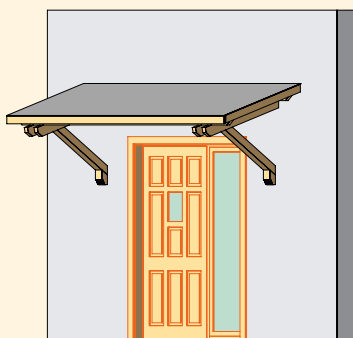

Cod. APE02 cm 125x200
Cod. APE03 cm 125x300

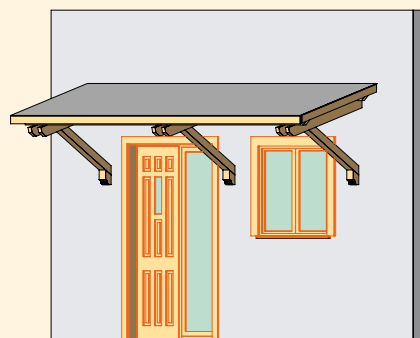

Cod. APE04 cm 125x400

Dati tecnici

- Travi portanti sez mm 45x115.
- Puntoni bilame sez mm 90x90.
- Arcarecci sez mm 45x90.
- Cornici sez mm 27x80.
- Legno impregnato a pressione RAL3 con preservanti senza cromo e arsenico.
- Copertura in perlinato grezzo spessore mm 19 e membrana bituminosa.

Données techniques

- Poutres portantes sect. mm 45x115.
- Chevrons bilame sect. mm 90x90.
- Pannes sect. mm 45x90.
- Corniches sect. mm 27x80.
- Bois imprégné sous pression RAL3 avec des préservateurs sans du chrome et de l'arsenic.
- Couverture en lambris brut esp. mm 19 et membrane bitumineuse.

Datos técnicos

- Vigas maestras secc. mm 45x115.
- Puntales dos laminas secc. mm 90x90.
- Cabios secc. mm 45x90.
- Cornisas secc. mm 27x80.
- Madera impregnada a presión RAL 3 con protectores sin cromo ni arsénico.
- Recubrimiento de tablas brutas esp. mm 19 y membrana bituminosa.

Technical data

- Supporting beams sect. mm 45x115.
- Bi-laminate struts sect. mm 90x90.
- Purlins sect. mm 45x90.
- Frames sect. mm 27x80.
- RAL 3 Pressure impregnated wood with chromium and arsenic-free preservatives.
- Cover in rough matchboarding thick. mm 19 and bituminous membrane.